



Product Brief

Intel® CE 5039
DVB-S Free-to-Air* Tuner
Consumer Electronics

Integrated L Band Zero Intermediate Frequency Free-to-Air* Tuner



Product Overview

The Intel® CE 5039 DVB-S Free-to-Air* tuner is a fully integrated L band zero intermediate frequency (ZIF) tuner that meets the performance requirements of the European Broadcast Union ETS 300 421. The Intel CE 5039 DVB-S tuner features a programmable RF loop-through, independent RF and IF automatic gain control (AGC), and fully integrated "power and forget" voltage controlled oscillators (VCOs) and baseband filters that require no calibration, alignment or temperature/aging compensation.


The baseband channel filters have continuously programmable bandwidth for 1 to 45 Msps operation. The Intel CE 5039 DVB-S Free-to-Air tuner has excellent sensitivity performance at low power consumption and includes software/hardware power-down modes for Energy Star* requirements.

Satellite Receiver Application

Intel supports the Intel CE 5039 DVB-S Free-to-Air tuner with a reference design for the Free-to-Air market segment. This reference design uses the Intel® CE 6313 QPSK DVB-S demodulator and enables you to quickly evaluate and implement the DVB-S standard for your application.

The solution includes complete documentation and test results, with software supported directly by Intel. It offers excellent signal-handling performance at very low power consumption and is optimized for the specific field requirements of the Free-to-Air market segment.

Application Diagram

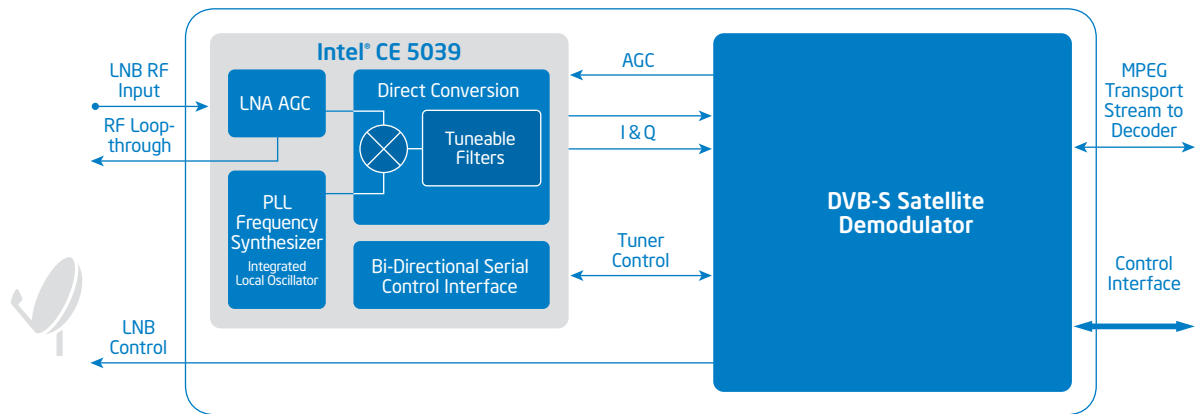

Product Features

Intel® CE 5039 DVB-S Free-to-Air Tuner

- Performance compliance standards
 - ETSI ETS 300 421 DVB-S
- Programmable RF loop-through
- High sensitivity < -84.5 dBm at 27.5 Msps
- Independent RF and IF AGC control
- Fifth-order baseband filters with bandwidth adjustable from 6 to 43 MHz
- Fully integrated—alignment free—“power and forget” baseband filters and VCOs
- Low power consumption from 3v3 supply
 - Less than 510 mW (typical) normal operation—RF loop-through enabled
 - Eco-friendly standby 10 mW and sleep modes 0.7 mW
- Eutelsat DISEqC* 2v2 receive/transmit for full control of LNB and dish
- Operational temperature range -10 to $+85^{\circ}\text{C}$
- Compact 28-pin QFN 5x5 mm package

Simplified Design

- Full RF and IF “on-chip” integrated feature set
 - VCOs and PLL frequency synthesizer
 - Baseband filters
 - RF loop-through
 - RF and IF AGC control
- Simple programmability using 2-wire bus interface
- Full front-end receiver designs for Free-to-Air applications using the Intel CE 6313 DVB-S demodulator

Customer Support

- Offered with a production-ready reference design optimized for the Free-to-Air market segment



For more information, visit the Intel Consumer Electronics home page at: www.intel.com/go/consumerelectronics

Information in this document is provided in connection with Intel products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Intel's terms and conditions of sale for such products, Intel assumes no liability whatsoever, and Intel disclaims any express or implied warranty, relating to sale and/or use of Intel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. Intel products are not intended for use in medical, life saving, or life sustaining applications. Intel may make changes to specifications and product descriptions at any time, without notice.

©2006 Intel Corporation. Intel, the Intel logo, Intel. Leap ahead. and the Intel. Leap ahead. logo are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. All rights reserved.

*Other names and brands may be claimed as the property of others.

Printed in USA

0206/PDF/MB/CM

Please Recycle

312214-001